



LoRa® SPY T2



Temperature recorder
with a long-range LoRaWAN™ connectivity



Non contractual photo



Freezer Standard version

Presentation

The LoRa® SPYT2 measures and records temperature thanks to an external probe. Data are sent to the JRI secure Cloud by LoRaWAN™ network of the telecom operators members of the LoRa Alliance™, or by a local network. In case of threshold excursions, real-time alerts are sent.

Designed to monitor thermo-controlled chambers, the LoRa® SPY T2 can be fixed outside thanks to its magnet allowing to visualize data measurement.

Technical features

	Standard version	Incubator version
Interface	Status LED lights, On/Off touch sensitive button, LCD display	
Measurement range	-50°C to +105°C	+30°C to +50°C
Accuracy	±0.3°C from -20°C to +30°C ±0.5°C out of this range	±0.2°C
Memory	10 000 data points	
Communication frequency	868 MHz / 915 MHz	
Radio range	Up to 16 km open field range	
Sensor	External Class A PT 100 - Ø5x20mm	
Resolution	0.01	
Measuring interval	Adjustable from 1 mn to 5 mn	
Transmission & recording interval (internal memory)	Adjustable from 1 mn to 24 hrs	
Response time σ_{90}	~2 mn	
Operating conditions	-30°C to +70°C	
Protection	IP65	
Case	Polycarbonate – Food contact	
Dimensions and weight	87 x 64 x 25 mm / ~ 100 g	
Cable length	30 cm and 3 m	
Power supply	Replaceable Lithium 3,6v battery	
Battery lifetime	2 years	
Fixation	Fixing eyelets and integrated magnets	
Supplied with	Blue and green identification rings	Yellow identification ring
	User manual on www.jri-corp.com	
Compliance	CE, ROHS, FCC, EN 300-320, NF EN 12830	
Standard calibration points	-18°C / +5°C / +25°C	+36°C / +38°C / +50°C


Benefits

- **Easy-to-use**
The recorder is ready-to-use and has operating and alarm lights
- **Excellent measurement accuracy**
- **Several modes of data exploitation**




External temperature probe

Fixing eyelets and integrated magnets
Replaceable battery

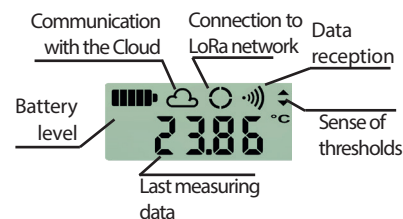

Communication with the Cloud
Connection to LoRa network
Data reception
Battery level
Sense of thresholds
Last measuring data

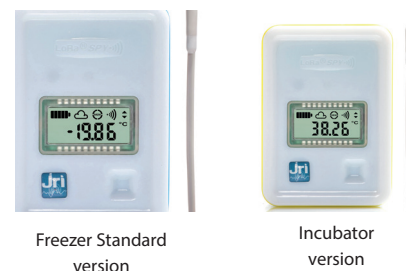

Freezer Standard version

Incubator version

17 349b EN 01 07

Part Numbers	868 MHz		915 MHz
	With battery	Without battery	Without battery
STANDARD VERSION			
LoRa SPY T2 30cm	11804EU	11804EX	12269EX
LoRa SPY T2 3m	118052E	118052X	12271EX
INCUBATOR VERSION			
LoRa SPY T2 30cm	11804_I EU	11804_I EX	12269_I EX
LoRa SPY T2 3m	11805_2IE	11805_2IX	12271_I EX